CDR-15 Series

15 W AC/DC DIN Rail Power Supply

CoolPower Solutions

- Universal Input 90~264Vac
- 100% Full Load Burn-in Test
- All Round Protections: Short Circuit, Over Voltage, Over Current, Over Temperature
- Cooling by Free Air Convection
- LED Indicator for DC Power On
- LED Indicator for DC Low



Electrical specifications

Model No.		CDR15-12	CDR15-24
Max Output Wattage (W)		14,4 W	15,6 W
Input	Voltage	90-264 VAC	
	Frequency	47-63 Hz	
	Current (typ at full load)	0,28 A (115 VAC) / 0,15 A (230 VAC)	
	Inrush current (max)	Cold start 30 A (115 VAC) / 60 A (230 VAC) , inrush limiting circuit	
	Stand-by power consumption	1,7 W / 230 VAC typically	
	Surge voltage L-N	2 kV typically	
Output	Voltage (VDC)	12 V	24 V
	Voltage adjustable range	11,6 - 12,3 VDC	23,5 - 24,5 VDC
	Output voltage accuracy	Typ. ±1 %	Typ. ±1 %
	Rated current	1,2 A	0,65 A
	Minimum load	0 A	0 A
	Line regulation	1% typically	1% typically
	Load regulation	1% typically	1% typically
	Ripple (max)	12 mV	15 mV
	Efficiency (typ)	80 %	83 %
	Hold-up time (typ)	20 ms / 115 VAC	
	Turn-on delay time (typ)	100 ms, / 115 VAC	
Protection	Short circuit	Hiccup mode, the power supply will recover after the power is turned on again	
	Over current	1,8 A	0,9 A
		Type: Cut off, recovers automatically after fault condition is removed	
	Over voltage	18 V	30 V
		Protection type : Cut off, recover after the power is turned on again	
	Over temperature	Protection value 100±10°C. Type: Cut off, recover after the power is turned on again.	
Environment	Operating temperature	-25°C…+70°C (with derating)	
	Humidity	20 - 95% RH	
	MTBF	Min 200 000 h @ Full load, 220 VAC input, 25°C ambient temperature	
Physical	Dimension (L x W x H)	22,5 x 95 x 108 mm	
	Weight	200 g	
	Cooling method	Free air convection	
Safety	Safety standards	Design refer to UL60950-1, EN60950-1	
	Isolation voltage	I/P-O/P: 3KVac, I/P-FG: 1.5KVac, O/P-FG: 1.5KVac	
	Isolation resistance	100mΩ Max./500VDC	
	EMC	EN 55022:2010+AC:2011 (CISPR 22:2008) ClassB EN 61000-3-2:2014 (IEC 61000-3-2:2014) EN 61000-3-3:2013 (IEC 61000-3-3:2013) EN 55024:2010 (CISPR 24:2010)	
Note	1. The ripple values are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with 0.1uF & 47uF parallel capacitor under ambient temperature 25℃ at rated input voltage and rated load; 2. The efficiency values are measured under ambient temperature 25℃ at rated input voltage and rated load. 3. Unless otherwise specified, all the above parameters are measured at ambient temperature of 25℃, rated load and Vin=115/230Vac.		

Cool Power Solutions Oy
Vanha Rajamäentie 173
FI-05200 Rajamäki
FINLAND

Tel: +358-9-2906 1990
Fax: +358-9-2906 1991


Email: info@cps.fi
Web: www.cps.fi

CDR-15 Series

15 W AC/DC DIN Rail Power Supply

CoolPower Solutions

Mechanical Specifications

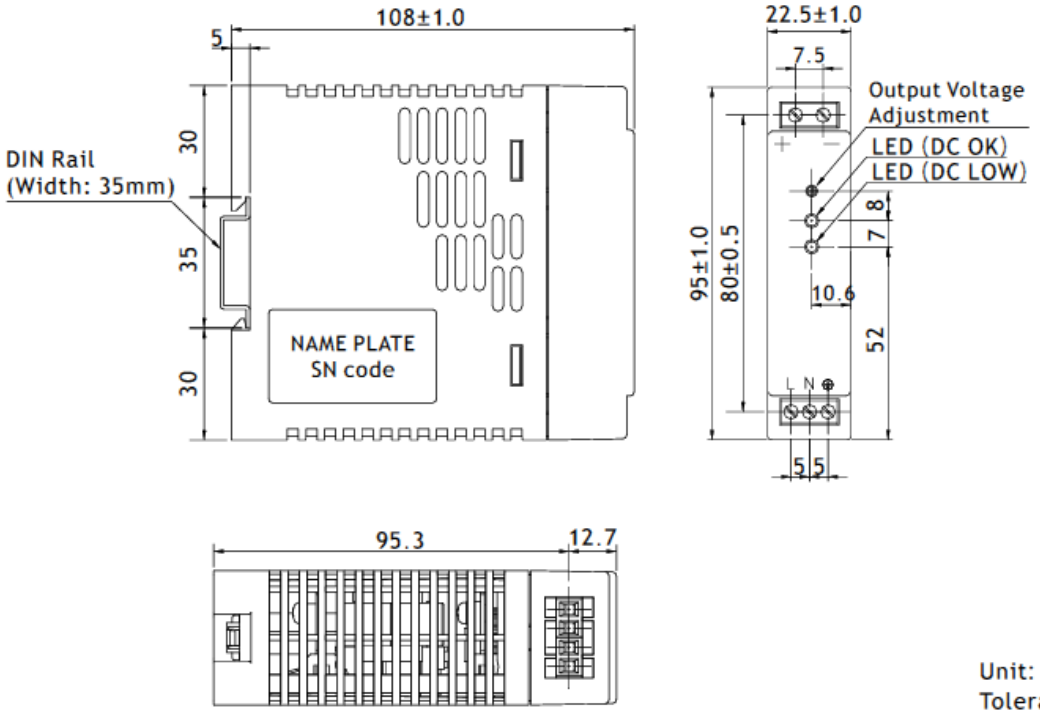

Unit: mm
Tolerance: ±1.0


CoolPower

Connections



Marking	No.	Assignment
+	1	DC(+) Output Terminal
−	2	DC(-) Output Terminal
L	3	AC(L) Input Terminal
N	4	AC(N) Input Terminal
⏚	5	AC Grounding Terminal
V-ADJ.	/	DC Output voltage adjustment trimmer
DC OK	/	DC Output OK indication LED(Green)
DC LOW	/	DC Output Low indication LED(Red)

Electrical curves

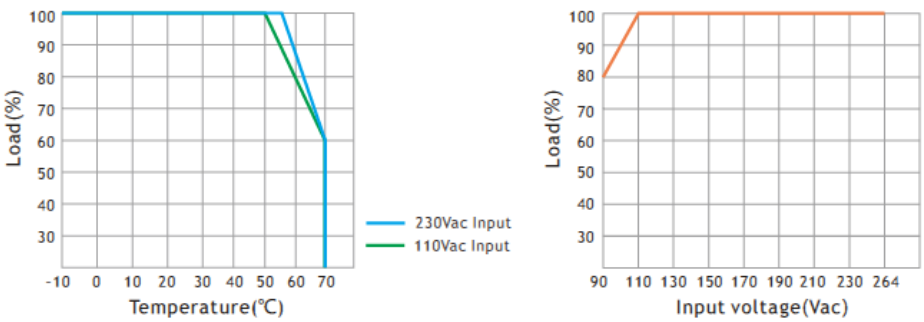

Cool Power Solutions Oy
Vanha Rajamäentie 173
FI-05200 Rajamäki
FINLAND

Tel: +358-9-2906 1990
Fax: +358-9-2906 1991

Email: info@cps.fi
Web: www.cps.fi