

SNP-G04 Series

40 W AC/DC Switch Mode Power Supplies – Open Frame

CoolPower
Solutions

- Only 0.91 inch height
- 7.3 Watt per cubic inch
- With ITE & Medical (-M) safety
- Operation from -20°C to 70°C by convection
- Efficiency between 84% to 86%
- Compatible to Class I / II safety & EMC



Electrical specifications

Input	Voltage	90-264 VAC
	Frequency	47-63 Hz
	Inrush Current	< 60 A at 230 VAC, cold start, 25°C
Output	Output Power	40 W, Peak 56 W
	Voltage (VDC)	See table below
	Current (A) max.	See table below
	Efficiency	84% - 86%
Hold-up Time	>18 ms at rated load and 115VAC	
Protection	Over Load Protection	Auto recovery
	Over Voltage Protection	Latch off
	Short Circuit Protection	Auto recovery
Environment	Operating Temperature	-20°C ... +70°C (derating: 2.5% / °C > 50°C)
	Storage Temperature	-40°C ... +85°C
	Humidity	5% to 90% RH, non-condensing
Physical	Dimension (L x W x H)	50.8 x 76.2 x 23.1 mm
	Weight	89 g
	Cooling	Convection cooling
	Connections	AC input: Molex 5277-02A or equivalent DC output: Molex 5273-04A or equivalent
Safety & EMC	EMI	EN55022 "B", EN61000-3-3
	Harmonics	EN61000-3-2 class A
	EMS	EN61000-4-2,-3,-4,-5,-6,-8,-11
	Safety Approvals	UL60950-1 : (cULus) EN 60950-1 : 2006 + A11 (TUV) ANSI/AAMI ES60601-1 : 2005 (cULus)

SNP-G04 Series

40 W AC/DC Switch Mode Power Supplies – Open Frame

CoolPower
Solutions


Models

Model	Output	Load				Initial accuracy*	Ripple Noise	Line Reg.	Load Reg.	Efficiency Typical
		Min	Rated	Max	Peak					
SNP-G047	+12 V	0 A	3.33 A		4.7 A	+11.8V~+12.2V	100mVpp	±0.5%	±1%	84% - 86%
SNP-G048	+15 V	0 A	2.66 A		3.8 A	+14.8V~+15.2V	100mVpp	±0.5%	±1%	84% - 86%
SNP-G045	+18 V	0 A	2.22 A		3.2 A	+17.8V~+18.2V	100mVpp	±0.5%	±1%	84% - 86%
SNP-G049	+24 V	0 A	1.66 A		2.4 A	+23.7V~+24.3V	150mVpp	±0.5%	±1%	84% - 86%
SNP-G04G	+28 V	0 A	1.42 A		2.0 A	+27.7V~+28.2V	150mVpp	±0.5%	±1%	84% - 86%
SNP-G04J	+36 V	0 A	1.11 A		1.6 A	+35.6V~+36.4V	150mVpp	±0.5%	±1%	84% - 86%
SNP-G04T	+48 V	0 A	0.83 A		1.16 A	+47.6V~+48.4V	150mVpp	±0.5%	±1%	84% - 86%

Notes

1. At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
2. Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
3. Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load at another output set to 60% rated load.
4. Ripple & noise is measured by using 15MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor at rated load and nominal line.
5. Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
6. Efficiency is measured at rated load and nominal line.

Dimensions

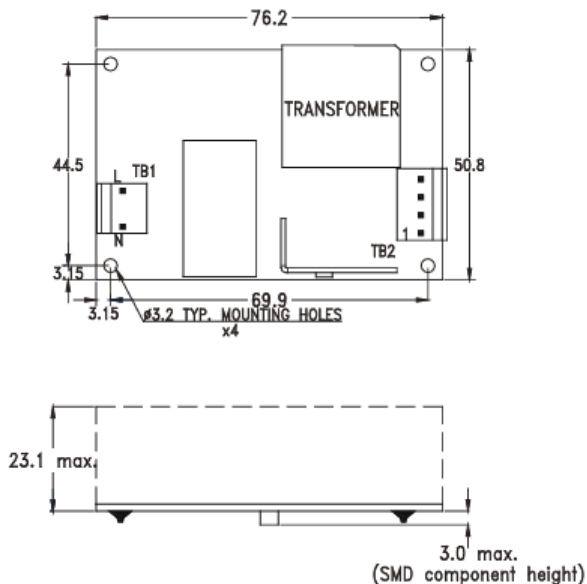

Derating curve:

